




Features:

- Smart relay behavior causing to unblock and block the engine depending of the equipment location
- Whole life history of your application movement through logged gps coordinates easily importable to google maps
- FAT32 SD card format provides folders, files data structure immediately visible in any PC OS (Windows, Linux, ..) or mobile phone (Android, iOS) with common micro USB cabel
- No other HW tool for device setting, after connection with cabel the device acts as the external hard drive (mass storage device), configuration file is edited on the disk
- Robust automotive design - developed to be compatible with VW 80 000, VW 801 01 standards
- New FW automatic re-flashing function

Applications:

- protecting of gen-sets, pumps, machinery on construction sites, etc. ..
- marine applications

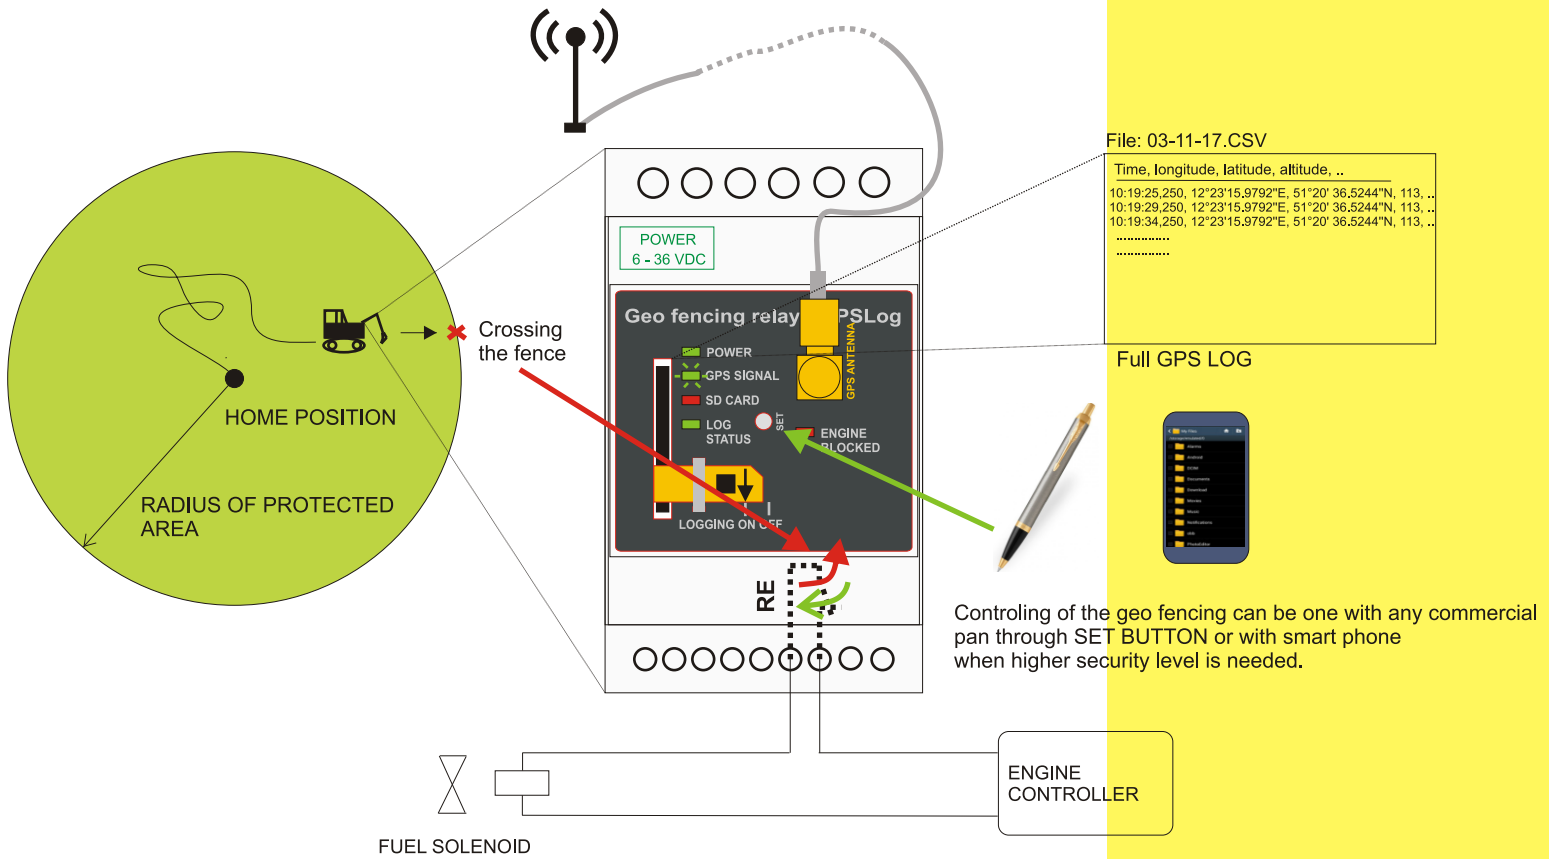

Technical data:

- Nominal power supply: 12, 24 VDC
- Power supply range: 6 – 36 VDC (voltage under 8 V is indicated by flashing of power LED)
- Power consumption: 350 mA for 12 VDC, 250 mA for 24 VDC
- Temperature range: - 40 – 85 °C
- Maximal relay current: 10 A
- Dimensions: 81 x 62,5 mm
- Weight: 660 g
- Protection level: IP 67